


RJ Series Slim Power Relays

Compact and rugged power relays. Large switching capacity.

- Compact housing only 12.7-mm wide.
- Large contact rating
RJ1S (1-pole): 12A
RJ2S (2-pole): 8A
- Non-polarized LED indicator available. IDEC's unique light guide structure enables high visibility of coil status from any direction.
- Excellent electrical and mechanical life.
Electrical life: 200,000 operations (AC load)
Mechanical life: 30 million operations (AC coil)
- Environmentally friendly, RoHS directive compliant (EU directive 2002/95/EC). Contains no lead, cadmium, mercury, hexavalent chromium, PBB or PBDE).
- Diode type
Diode reverse withstand voltage: 1000V
- UL recognized, CSA certified, EN compliant.
- Lloyd Register type approved.

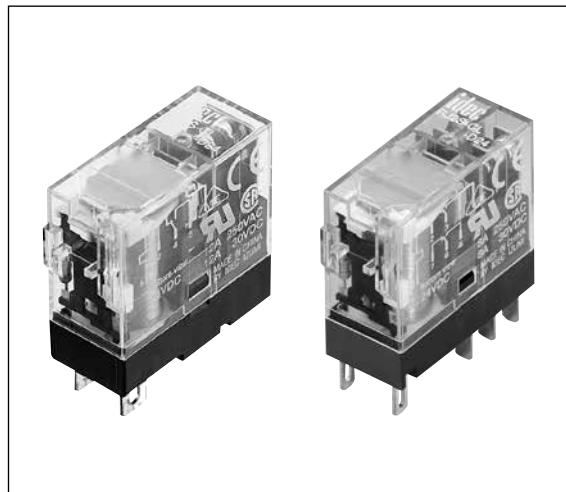

Applicable Standards	Mark	Certification Organization / File No.
UL508		UL recognized, File No. E55996
CSA C22.2 No. 14		CSA File No. LR35144
EN61810-1	 Reg.-Nr. B312	VDE No. 40015055
		EU Low Voltage Directive

Plug-in Terminal

Style	1-pole (SPDT)			2-pole (DPDT)		
	Part No.	Code	Part No.	Code	Part No.	Code
Standard (with LED Indicator)	RJ1S-CL-*	A12 D5	RJ2S-CL-*	A12 D5	A12 D5	A12 D5
		A24 D6		A24 D6	A24 D6	A24 D6
Simple (without LED Indicator)	RJ1S-C-*	A110 D12	RJ2S-C-*	A110 D12	A110 D12	A110 D12
		A120 D24		A120 D24	A120 D24	A120 D24
With diode (DC coil only) (with LED indicator) A1: -, A2: +	RJ1S-CLD-*	A220 D48	RJ2S-CLD-*	A220 D48	A220 D48	A220 D48
		A230 D100		A230 D100	A230 D100	A230 D100
With diode (DC coil only) A1: -, A2: +	RJ1S-CD-*	A240	RJ2S-CD-*	A240	A240	A240
With diode (DC coil only) (with LED indicator) A1: +, A2: -	RJ1S-CLD1-*	D12	RJ2S-CLD1-*	D12	D12	D12
		D24		D24	D24	D24
With diode (DC coil only) A1: +, A2: -	RJ1S-CD1-*	D48	RJ2S-CD1-*	D48	D48	D48
		D100		D100	D100	D100
With RC (with LED indicator)	RJ1S-CLR-*	A12	RJ2S-CLR-*	A12	A12	A12
With RC (without LED indicator)	RJ1S-CR-*	A24		A24	A24	A24
		A110		A110	A110	A110
		A220		A220	A220	A220

Note: Coil voltages other than shown above are available (ex. A115, A230, A240)

Contact Ratings

No. of Poles	Contact	Allowable Contact Power		Rated Load			Allowable Switching Current	Allowable Switching Voltage	Minimum Applicable Load (Note)
		Resistive Load	Inductive Load	Voltage	Resistive Load	Inductive Load $\cos \phi = 0.3$ $L/R = 7 \text{ ms}$			
1	NO	3000VA AC 360W DC	1875VA AC 180W DC	250V AC 30V DC	12A 12A	7.5A 6A	12A	250V AC 125V DC	5V DC, 100 mA (reference value)
	NC	3000VA AC 180W DC	1875VA AC 90W DC	250V AC 30V DC	12A 6A	7.5A 3A			
2	NO	2000VA AC 240W DC	1000VA AC 120W DC	250V AC 30V DC	8A 8A	4A 4A	8A	250V AC 125V DC	5V DC, 10 mA (reference value)
	NC	2000VA AC 120W DC	1000VA AC 60W DC	250V AC 30V DC	8A 4A	4A 2A			

Note: Measured at operating frequency of 120 operations per minute.
Failure rate level P, 1/10,000,000 (reference value) (JIS C5003)

Approved Ratings

Voltage	UL				CSA								VDE			
	Resistive				Resistive				Inductive				Resistive		AC-15, DC-13 (Note)	
	RJ1		RJ2		RJ1		RJ2		RJ1		RJ2		RJ1	RJ2	RJ1	RJ2
	NO	NC	NO	NC	NO	NC	NO	NC	NO	NC	NO	NC	NO	NO	NO	NO
250V AC	12A	12A	8A	8A	12A	12A	8A	8A	7.5A	7.5A	4A	4A	12A	8A	6A	3A
30V DC	12A	6A	8A	4A	12A	6A	8A	4A	6A	3A	4A	2A	12A	8A	2.5A	2A

Note: According to the utilization categories of IEC60947-5-1

Coil Ratings

Rated Voltage		Coil Voltage Code	Without LED Indicator				With LED Indicator				Operating Characteristics (against rated values at 20°C)			Power Consumption
			Rated Current (mA) ±15% (at 20°C)		Coil Resistance (Ω) ±10% (at 20°C)		Rated Current (mA) ±15% (at 20°C)		Coil Resistance (Ω) ±10% (at 20°C)		Minimum Pickup Voltage	Dropout Voltage	Maximum allowable voltage (Note)	
			50 Hz	60 Hz	50 Hz	60 Hz	50 Hz	60 Hz	50 Hz	60 Hz				
AC 50/60 Hz	12V AC	A12	87.3	75.0	62.5	91.1	78.8	62.5	80% maximum	30% minimum	140%	Approx. 0.9 VA (60Hz)		
	24V AC	A24	43.9	37.5	243	47.5	41.1	243						
	110V AC	A110	9.6	8.2	5270	9.5	8.1	5270						
	120V AC	A120	8.8	7.5	6400	8.7	7.4	6400						
	220V AC	A220	4.8	4.1	21530	4.8	4.1	21530						
	230V AC	A230	4.6	3.9	24100	4.6	3.9	24100						
DC	240V AC	A240	4.3	3.7	25570	4.3	3.7	25570	70% maximum	10% minimum	170%	Approx. 0.53W		
	5V	D5	106		47.2	110		47.2						
	6V	D6	88.3		67.9	92.2		67.9						
	12V	D12	44.2		271	48.0		271						
	24V	D24	22.1		1080	25.7		1080						
	48V	D48	11.0		4340	10.7		4340						
100-110V		D100	5.3-5.8		18870	5.2-5.7		18870						

Note: Maximum allowable voltage is the maximum voltage that can be applied to relay coils.

Specifications

Model	RJ1S			RJ2S			
Number of Poles	1-pole			2-pole			
Contact Configuration	SPDT			DPDT			
Contact Material	Silver-nickel alloy						
Degree of Protection	IP40						
Contact Resistance (initial value) (*1)	50 mΩ maximum						
Operate Time (*2)	15 ms maximum						
Release Time (*2)	10 ms maximum (with diode: 20 ms maximum)						
Dielectric Strength	Between contact and coil		5000V AC, 1 minute		5000V AC, 1 minute		
	Between contacts of the same pole		1000V AC, 1 minute		1000V AC, 1 minute		
	Between contacts of different poles		—		3000V AC, 1 minute		
Vibration Resistance	Operating extremes		10 to 55 Hz, amplitude 0.75 mm				
	Damage limits		10 to 55 Hz, amplitude 0.75 mm				
Shock Resistance	Operating extremes		NO contact: 200 m/s², NC contact: 100 m/s²				
	Damage limits		1000 m/s²				
Electrical Life (rated load)	AC load: 200,000 operations minimum (operation frequency 1800 operations per hour) DC load: 100,000 operations minimum (operation frequency 1800 operations per hour)						
Mechanical Life (no load)	AC coil: 30,000,000 operations minimum (operation frequency 18,000 operations per hour) DC coil: 50,000,000 operations minimum (operation frequency 18,000 operations per hour)						
Operating Temperature (*3)	-40 to +70°C (no freezing)						
Operating Humidity	5 to 85% RH (no condensation)						
Weight (approx.)	19g						

Note: Above values are initial values.

*1: Measured using 5V DC, 1A voltage drop method.

*2: Measured at the rated voltage (at 20°C), excluding contact bounce time.


*3: 100% rated voltage.

Applicable Socket


Terminal	Part No.		Page
	RJ1S (1-pole)	RJ2S (2-pole)	
Standard Screw Terminal	SJ1S-05B	SJ2S-05B	
Finger-safe Screw Terminal	SJ1S-07L	SJ2S-07L	66

Electrical Life Curve

RJ1 (resistive load)

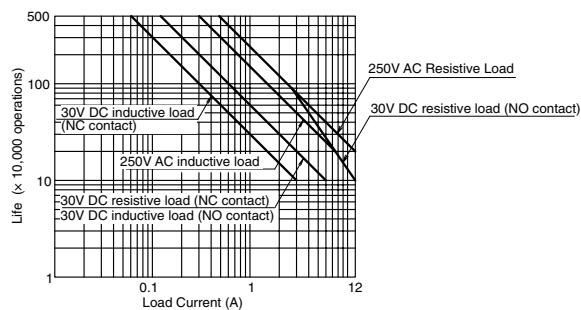


RJ2 (resistive load)

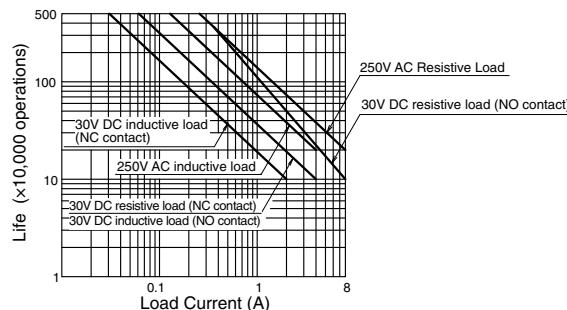


Maximum Switching Capacity

RJ1 (resistive load)



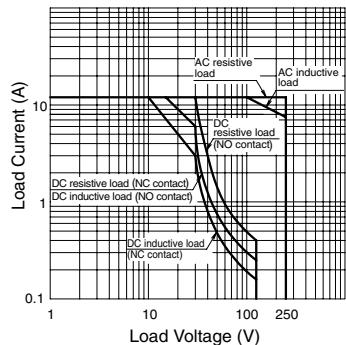


RJ2 (resistive load)



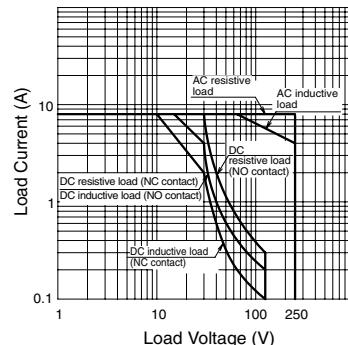


Operating Temperature and Coil Temperature Rise

RJ1

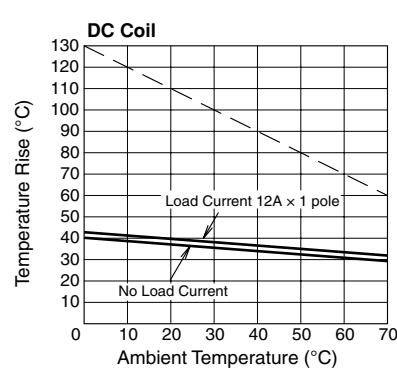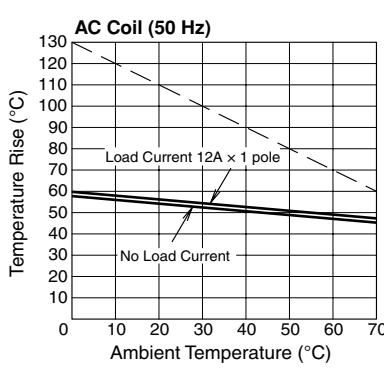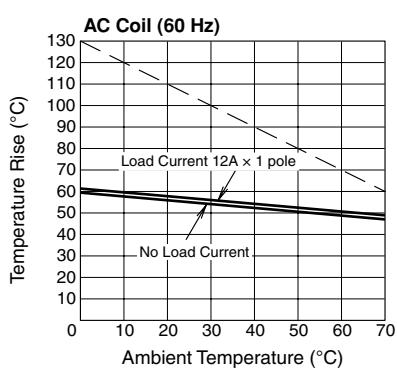

RJ2

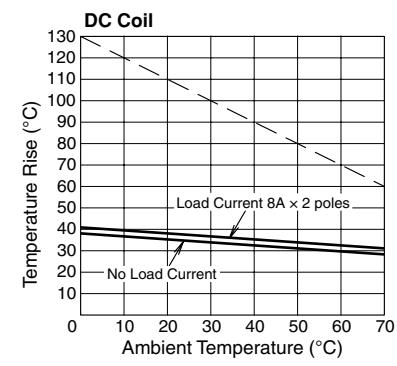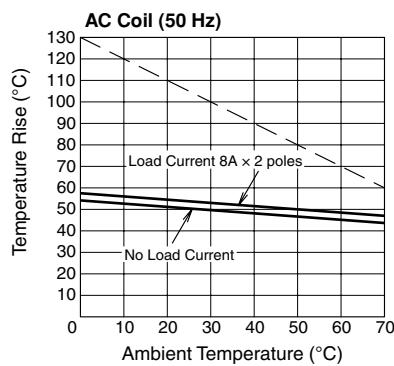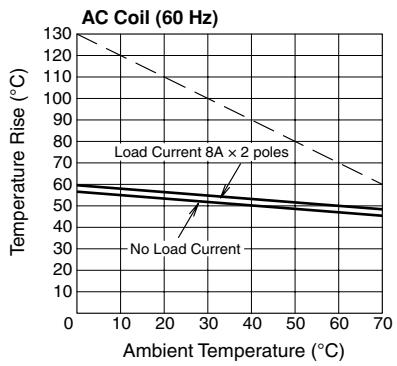

The above temperature rise curves show characteristics when 100% the rated coil voltage is applied.
The slanted dashed line indicates allowable temperature rise for the coil at different ambient temperatures.

Relays
RJ
RU
RY
RM
RH
RR
RV8H
RF1V
RF2

Sockets
SJ
DF
SU
SF1V

Relay Sockets