

# idec SWITCHING POWER SUPPLY INSTRUCTION SHEET

## PS5R Series

### IDECC IZUMI CORPORATION

● Before operating the switching power supply, read this instruction sheet and keep it for future reference.

#### 1. Safety Standard Conditions

Applicable standard : UL 508, CSA C22.2 No. 14, EN 60950  
 Pollution degree : 2  
 Leakage current : 0.75mA Max.

#### 2. Type No. Development

PS5R-□□  
 ① ②

① : Output Power    ② : Output Voltage  
 E : 100W                      24 : 24V DC

#### 3. Rating


Use the switching power supply with the output capacity within the values shown below.

PS5R-E□

Input : 100-120VAC, 2.5A, 200-240VAC, 1.5A, 50-60Hz

Type	Output Voltage VDC	Output Current Max. A	Output Capacity Max. W
24	21.6-26.4	4.2	100.8

#### 4. Output Derating




①: Mounting A  
 ②: Mounting B


Note: In order to comply with UL 508 (EN 60950) standards, the ambient operating temperature is as follows.

Type No.	ambient operating temperature UL508 (EN60950) (°C)	
	① : Mounting A	② : Mounting B
PS5R-E□	50 (50)	40 (35)

(Mounting Direction)



Mounting A




Mounting B

Mounting A : Standard Mounting on Vertical Plane  
 Mounting B : Mounting on horizontal Plane

#### 5. Terminal Marking and Description

- ① (L) AC Input Terminal
- ② (N) AC Input Terminal
- ③ (⊕) Ground Terminal (Protective earthing terminal)
- ④ (-V) DC Output Terminal
- ⑤ (+V) DC Output Terminal
- ⑥ (V. A D J.) Output Voltage Adjustment
- ⑦ (D C O N) Operation Indicator
- ⑧ (VOLTAGE SELECT) Voltage Select Terminals

PS5R-E□

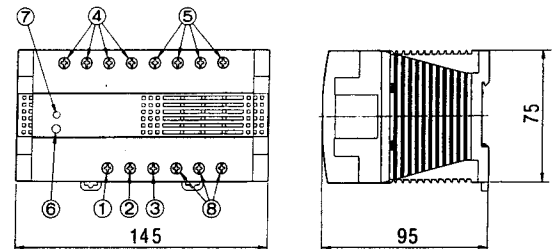


#### 6. Power Supply Installation

- ① Make sure of convection in consideration of sufficient heat radiation.
- ② Keep at least 10mm clearance around the switching power supply.
- ③ When the derating is in question provide forced air-cooling.
- ④ Use minimum 60°C wire.
- ⑤ Terminal torque 0.8 N · m..
- ⑥ Use copper wire only.
- ⑦ When mounting the switching power supply directly on a panel surface, see the mounting hole layout shown below.

PS5R-E□

Mounting hole layout

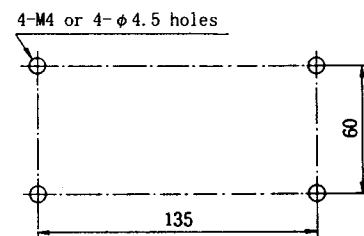

#### ⑧ Mounting on 35-mm-wide DIN Rail

<Mounting on DIN Rail>


- (1) Fasten the DIN Rail to a panel firmly.
- (2) Pull the clamp out from the switching power supply until the clamp clicks. Put the groove of the switching power supply on the DIN Rail, with the output terminal side up, press the switching power supply to the panel, and push the clamp in until the clamp clicks.
- (3) Use BNL5P mounting clips on both the sides of the switching power supply to prevent from moving sideways.

<Removing from DIN Rail>

Insert a flat screwdriver into the slot in the clamp. Pull the clamp out until the clamp clicks, and turn the switching power supply bottom out.

<Mounting>

<Removing>

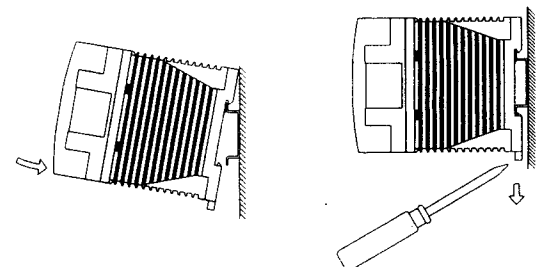

#### ⑨ Adjusting the Output Voltage

The output voltage can be adjusted within  $\pm 10\%$  of the rated output voltage using the V.ADJ (output voltage adjustment). Note that the overvoltage protection may work when the output voltage is raised.

#### ⑩ Overcurrent Protection

When an overcurrent flows due to an overload, the output voltage drops. When the load is reduced to a normal level, the normal output voltage is restored. Note that an overload or short-circuit condition continuing for an extended period of time will deteriorate or damage internal elements.

#### ⑪ Overvoltage Protection

These models use a manual reset method after power shutdown. To recover from output voltage drop due to an overvoltage, turn off the AC input, and turn on the AC input after approximately 1 minute.

#### ⑫ Series Operation

Two PS5R switching power supplies can be connected in series. When connecting the switching power supplies in series, insert a Schottky diode in the output line of each switching power supply.

#### ⑬ Parallel Operation

PS5R switching power supplies cannot be connected in parallel. If connected in parallel, internal elements and loads may be damaged.


#### ⑭ Insulation Resistance and Dielectric Strength Tests

When making these tests, connect the AC input terminals together and the output + and - terminals together. Rapid application and interruption of the test voltage will generate a surge voltage, which may damage the switching power supply.

## 7. Selecting Input Voltage

The PSSR-E can accept input of 100-120VAC and 200-240VAC by connecting appropriate VOLTAGE SELECT terminals with a jumper as shown below.

Make sure of correct jumper position before connecting the input. The jumper is set 200-240VAC input before shipment at factory.

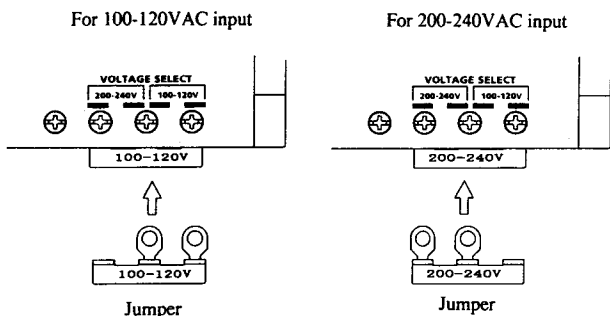

## SAFETY PRECAUTIONS

- Read the following safety precautions to make sure of correct operation before starting installation, wiring, and operation.
- In this instruction sheet, safety precautions are categorized in order of importance to Warning and Caution:



**WARNING**

...Warning notices are used to emphasize that improper operation may cause severe personal injury or death.



**WARNING**

- Do not use the switching power supply on control equipment, aircraft, trains, and atomic equipment where malfunction of the switching power supply may cause severe personal injury or threaten human life. These switching power supplies are designed for use on general electronic equipment such as office equipment, communication equipment, instrumentation equipment, and household appliances. Make sure that the operating conditions satisfy the values described in the catalog. Confirm the specification values before designing the equipment to use the switching power supply and before supplying power. Contact IDEC if you have any question.
- Do not modify or repair the switching power supply. Modification or repairing of the switching power supply by users may cause electrical shocks, damage, fire, malfunction, and other heavy accidents. Do not install the switching power supply where a human body may come into contact while power is supplied to the switching power supply. Do not touch the switching power supply during operation or immediately after turning off because some parts are heated and at a high voltage, causing burns or electrical shocks. The standard switching power supplies are designed for installation in equipment. Do not connect the output terminals or output lead wires together. Fire or damage may result.
- Include a protection in the equipment using the switching power supply in consideration of malfunction or damage of the load in case the switching power should fail. If the switching power supply should fail, a very high voltage drop may occur at the output terminals.
- Turn power off before wiring the switching power supply. Make sure of correct wiring. Incorrect wiring may cause electrical shocks or damage.



**CAUTION**

...Caution notices are used where inattention might cause personal injury or damage to equipment.



**CAUTION**

- Make sure of the correct input voltage. Incorrect input voltage may cause blown fuses, fuming, or fire. Make sure of correct polarity of input and output terminals before supplying power to the switching power supply.
- Do not touch any part inside the switching power supply. Prevent foreign objects from entering into the housing of the switching power supply. If the internal parts are touched by hand or foreign objects such as a paper clip or screw enters into the housing, accidents or damage may occur.
- Observe the temperature derating. The operating temperature is the temperature around the switching power supply. Use the switching power supply within the temperature derating curve. Otherwise, the internal temperature will rise and damage may be caused.
- Do not turn the output voltage adjustment beyond the limits. Otherwise, the switching power supply may be deteriorated and damage may be caused.
- When damage or malfunction should occur during operation, immediately turn power off and stop the switching power supply. Contact IDEC.
- Do not use or store the switching power supply in environments subjected to a large amount of vibrations or shocks. Otherwise, damage may be caused.
- Do not install the switching power supply in environments exposed to direct sunlight, iron particles, oil splashes, chemicals, and hydrogen sulfide. Do not use the switching power supply in humid places such as basements or greenhouses or in low-temperature places such as in freezers or in front of cooler outlet.